Anwendung/Application :

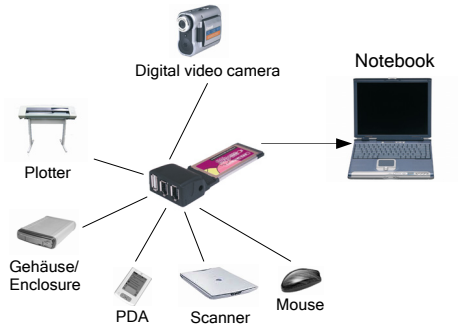

Operating System (OS): 98 SE, Me, 2000, xp, Server 2003, Linux, MacOS

Geprüft/Approved: CE FC RoHS WEEE Reg.Nr.: DE97424562

Verpackung/Packing:

ExpressCard FireWire 1394A + USB 2.0

Beschreibung :	• Die EX-6603E ist eine Zusatzkarte für den neuen ExpressCard Bus um das Notebook mit zusätzlichen USB 2.0 und FireWire 1394A Ports zu erweitern. Sie hat einen USB 2.0 und zwei FireWire 1394A Ports.
Merkmale UBS 2.0 :	• ExpressCard mit einem USB 2.0 Port • Kann auch zusätzlich zu den USB Ports vom Motherboard installiert werden • Integrierter Dual-Speed USB Transceiver, Unterstützt auch ältere USB 1.1 kompatiblen Peripheriegeräte • Unterstützt EHCI Spezifikation • Unterstützt bis zu 127 Geräte
Merkmale FireWire 1394A :	• ExpressCard mit zwei FireWire 1394A Ports • Kann auch zusätzlich zu den FireWire Ports vom Motherboard installiert werden • Unterstützt bis zu 63 Geräte
Chip-Set :	• Texsas Instruments
Datenübertragung USB 2.0 : **Datenübertragung FireWire A :**	• Bis 480Mbps • Bis 400Mbps
Anschlüsse :	• 2 x FireWire 1394A • 1 x USB 2.0
Arbeitstemperatur : **Luftfeuchtigkeit :**	• 0 bis 55^{0}C • 5 bis 95%
Hardwaresysteme :	• ExpressCard Slot
Abmessung / Gewicht :	• 130 x 34 mm / 100g
Lieferumfang :	• EX-6603E, Treiber CD, Handbuch

ExpressCard FireWire 1394A + USB 2.0

Description :	• The EX-6603E it's a add-on card for the ExpressCard Bus to add more USB 2.0 and FireWire 1394B ports to you Notebook. There have one USB 2.0 and two FireWire 1394A port.
Feature USB 2.0 :	• ExpressCard with one USB 2.0 ports • Can install to existing USB ports from the Motherboard • Integer dual-speed USB transceiver, support all USB 1.1 compatible peripheral device's • Support EHCI specification • Support up to 127 device
Feature FireWire 1394A :	• ExpressCard with two FireWire 1394A port. • Can install to existing FireWire ports from the Motherboard • Support up to 63 devices
Chip-Set :	• Texsas Instruments
Data transfer rate USB 2.0 : **Data transfer rate FireWire A :**	• Up to 480Mbps • Up to 400Mbps
Connectors :	• 2 x FireWire 1394A • 1 x USB 2.0
Operating Temperature : **Operating Humidity :**	• 0 to 55^{0}C • 5 to 95%
Hardware system :	• ExpressCard Slot
Size / Weight :	• 130 x 34mm / 100g
Packaging contents :	• EX-6603E, Driver CD, Manual